




## SMBM-SMBM174XX

(Cable Assembly Coaxial SMB Male to SMB Male RG-174)

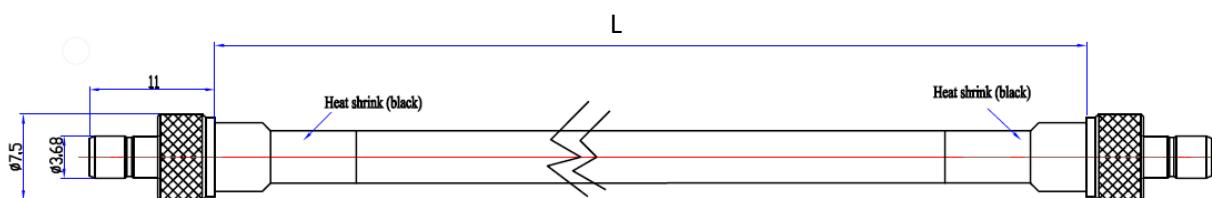

Mueller Electric Company  
2850 Gilchrist Rd. Bld 5A  
Akron, OH 44305

[www.muellerelectric.com](http://www.muellerelectric.com)

Toll Free: 800.955.2629  
Phone: 330.780.2525  
Fax: 330.780.2524

## Electrical Ratings

Electrical ratings of a cable assembly are determined by the limiting connector type and cable size.

Connector	Cable	Connector Impedance (Ohms)	Frequency (GHz)	VSWR
SMB	RG-174	50	0-3	1.35 MAX

## Product Attributes

Gender	Male to Male
Style	SMB to SMB
1st Connector	Gold Plated SMB Male Plug w/ PTFE Insulator
2nd Connector	Gold Plated SMB Male Plug w/ PTFE Insulator
Features	Shielded
Operating Temperature	-30°C (-22°F) to 70°C (158°F)
SMBM-SMBM17403	0.3M
SMBM-SMBM17405	0.5M
SMBM-SMBM17410	1M
RoHS 3 Compliant	