


BU-1420203011

(CONN SMA PLUG STR 50 OHM SOLDER)

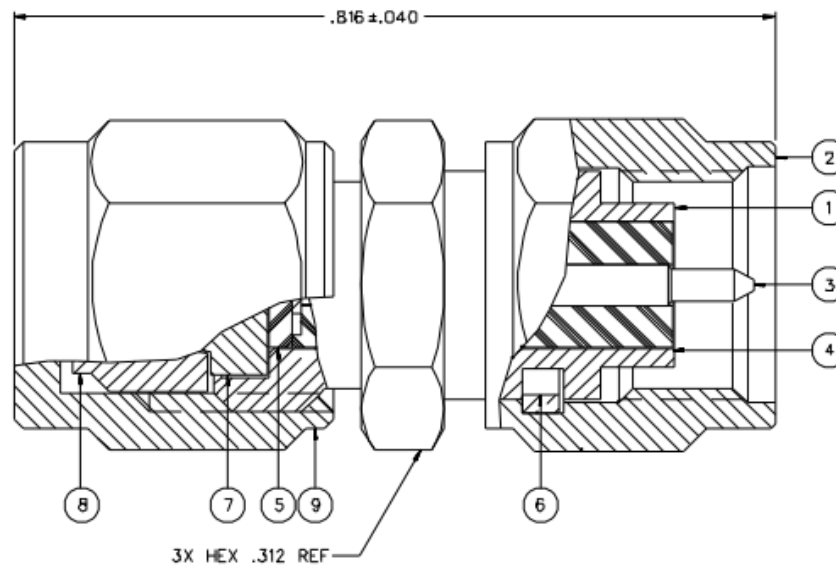

(Dimensions in Inches)

Specifications:

- Impedance: 50 Ohms
- Frequency Range: 0-12.4 GHz
- Working Voltage: 250V at Sea Level
- Dielectric Withstanding Voltage: 750V min at sea level
- Contact resistance: <3 milliohms
- Mating Torque: 7-10 Inch Pounds
- Material:
 - (1) Body – 1U” Gold plated Brass
 - (2) Interface Nut – 1U” Gold plated Brass
 - (3) Contact – 3U” Gold plated Brass
 - (4) Insulator – Teflon
 - (5) Insulator – Tefzel
 - (6) Retention Spring – Beryllium Copper
 - (7) Clamp Stem – 1U” Gold plated Brass
 - (8) Clamp Cone – 1U” Gold plated Brass
 - (9) Clamp Cone – 1U” Gold plated Brass
- Meets or exceeds the applicable paragraph of MIL-C-39012
- Operating Temperature: -65°C (-85°F) to 165°C (329°F)
- RoHS 3 Compliant