


BU-1420303416

(CONN SMA JACK STR 50 OHM CRIMP)

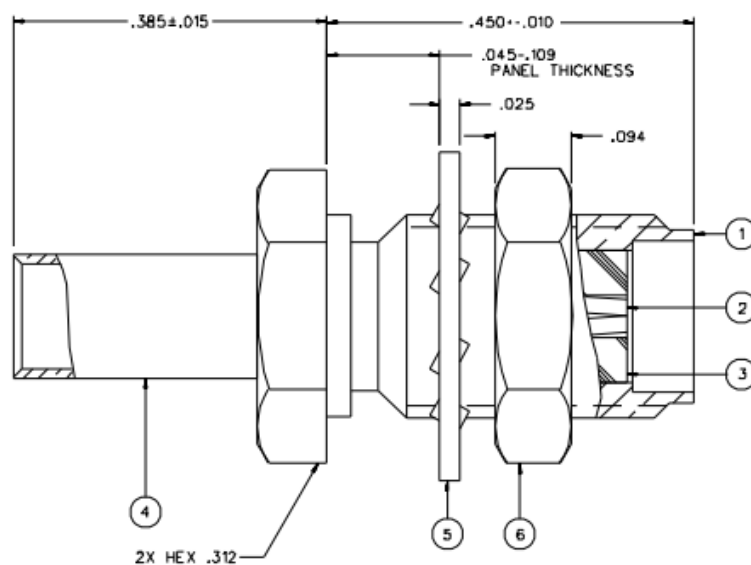

(Dimensions in Inches)

- Impedance: 50 Ohms
- Frequency Range: 0-12.4 GHz
- Working Voltage: 250V at Sea Level
- Dielectric Withstanding Voltage: 750V min at sea level
- Contact resistance: <3 milliohms
- Mating Torque: 7-10 Inch Pounds
- Material:
 - (1) Body – 1U” Nickel plated Brass
 - (2) Contact – 5U” Gold plated Beryllium Copper
 - (3) Insulator – Teflon
 - (4) Crimp Sleeve – 1U” Nickel plated Copper
 - (5) Lockwasher – 1U” Nickel plated Phosphor Bronze
 - (6) Nut – 1U” Nickel plated Brass
- Meets or exceeds the applicable paragraph of MIL-C-39012
- Operating Temperature: -65°C (-85°F) to 165°C (329°F)
- RoHS 3 Compliant