




BU-4150081XXX

(Cable Assembly Coaxial SMA Straight to SMA Straight Male to Male RG-086, Hand-Formable)

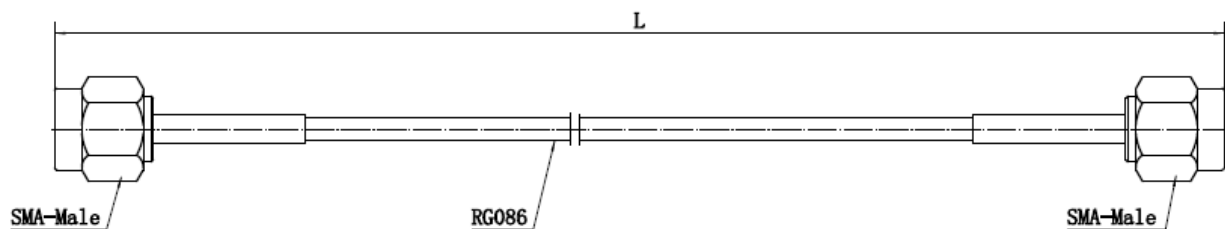

Mueller Electric Company
2850 Gilchrist Rd. Bld 5A
Akron, OH 44305

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524

Electrical Ratings

Electrical ratings of a cable assembly are determined by the limiting connector type and cable size.

Connector	Cable	Connector Impedance (Ohms)	Frequency Range (GHz)	VSWR	Working Voltage (At Sea Level)
SMA	RG-086	50	DC-12	1.3 MAX	335V

Product Attributes

Gender	Male to Male
Style	SMA to SMA
1st Connector	Gold Plated SMA Male Plug Straight
2nd Connector	Gold Plated SMA Male Plug Straight
Features	Shielded
Operating Temperature	-65°C (-85°F) to 150°C (302°F)
BU-4150081003	3" (76.2 mm)
BU-4150081004	4" (101.6 mm)
BU-4150081005	5" (127 mm)
BU-4150081006	6" (152.4 mm)
BU-4150081007	7" (177.8 mm)
BU-4150081008	8" (203.2 mm)
BU-4150081012	12" (304.8 mm)
BU-4150081018	18" (457.2 mm)
BU-4150081024	24" (609.6 mm)
BU-4150081MM150	150mm (5.9")
BU-4150081MM750	750mm (29.5")
RoHS 3 Compliant	