




# BU-4150069XXX

(CBL ASSY MMCX PLUG TO PLUG)

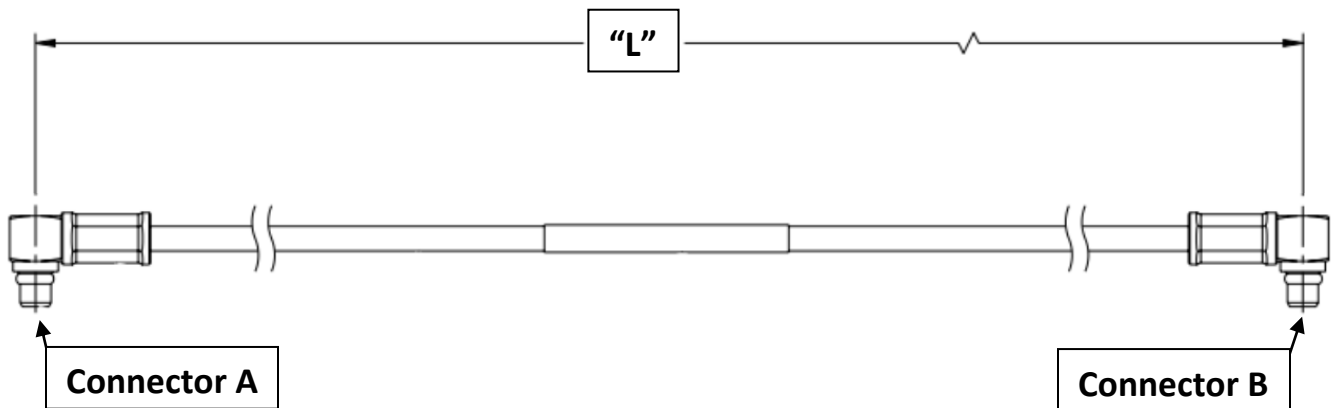

Mueller Electric Company  
2850 Gilchrist Rd. Bld 5A  
Akron, OH 44305

[www.muellerelectric.com](http://www.muellerelectric.com)

Toll Free: 800.955.2629  
Phone: 330.780.2525  
Fax: 330.780.2524

## Electrical Ratings

Electrical ratings of a cable assembly are determined by the limiting connector type and cable size.

Connector	Cable	Connector Impedance (Ohms)	Frequency (GHz)	Dielectric Withstanding Voltage	Working Voltage
MMCX	RG-316	50	6	500V	170V

## Product Attributes

Gender	Male to Male
Style	MMCX to MMCX
Connector A	Gold Plated MMCX Plug RA
Connector B	Gold Plated MMCX Plug RA
Features	Shielded
Operating Temperature	-65°C (-85°F) to 165°C (329°F)
BU-4150069006	6" (152.4 mm)
BU-4150069012	12" (304.8mm)
BU-4150069018	18" (457.2 mm)
BU-4150069024	24" (609.6 mm)
RoHS 3 Compliant	