




BU-4150103150

(CBL ASSY U.FL-MMCX PLG-PL 5.90)

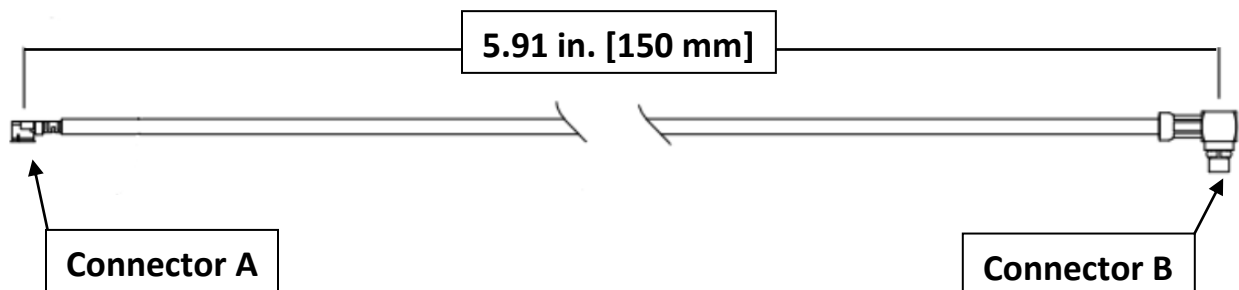

Mueller Electric Company
2850 Gilchrist Rd. Bld 5A
Akron, OH 44305

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524

Electrical Ratings

Electrical ratings of a cable assembly are determined by the limiting connector type and cable size.

Connector	Cable	Connector Impedance (Ohms)	Frequency (GHz)	Dielectric Withstanding Voltage
VARIES	Teflon Coaxial Cable 1.37mm	50	6	200V

Product Attributes

Gender	Male to Male
Style	U.FL to MMCX
Connector A	Gold Plated U.FL Plug RA
Connector B	Gold Plated MMCX Plug RA
Features	Shielded
Operating Temperature	-65°C (-85°F) to 165°C (329°F)
RoHS 3 Compliant	